

P
R
E
L
I
M
I
N
A
R
Y

DXN 107 EcoX



Ice Machine/Dispenser up to 66 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Compact ice or ice & water automatic dispenser, with appealing, contemporary "touch-screen" design.
- Ideal for free-refill self-service concepts with up to 1200 glasses filled per day and capable of dispensing ice for up to 100 customers in queue at one time.
- Available either touch-free or button activated.
- Possible to set ice only or ice & water on site and desired ice dosage (from 1' to 15' or continuous).
- Fast & friendly cleaning mode for the end user.
- Algorithm signaling when reservoir is temporarily empty.
- Full frontal visibility of settings and errors for preventative service check-up.
- Accessory: on request, it can be installed upon a specifically designed cabinet.



DXN 107
Cubelet 1 g
W 16 x D 15 x H 7-8 mm

CONDENSING SYSTEM

Air cooled

INTERNAL BIN CAPACITY

5 kg

REFRIGERANT GAS

R290

OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10°C | 38°C |
| Water temperature | 5°C | 38°C |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
[Apple store](#)
[Google play](#)
[Windows store](#)



www.scotsman-ice.it
www.scotsman-ice.com

Ice Machine/Dispenser up to 66 kg


DXN 107 EcoX

Ice Machine/Dispenser up to 66 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Ice Machine/Dispenser up to 66 kg

PRELIMINARY

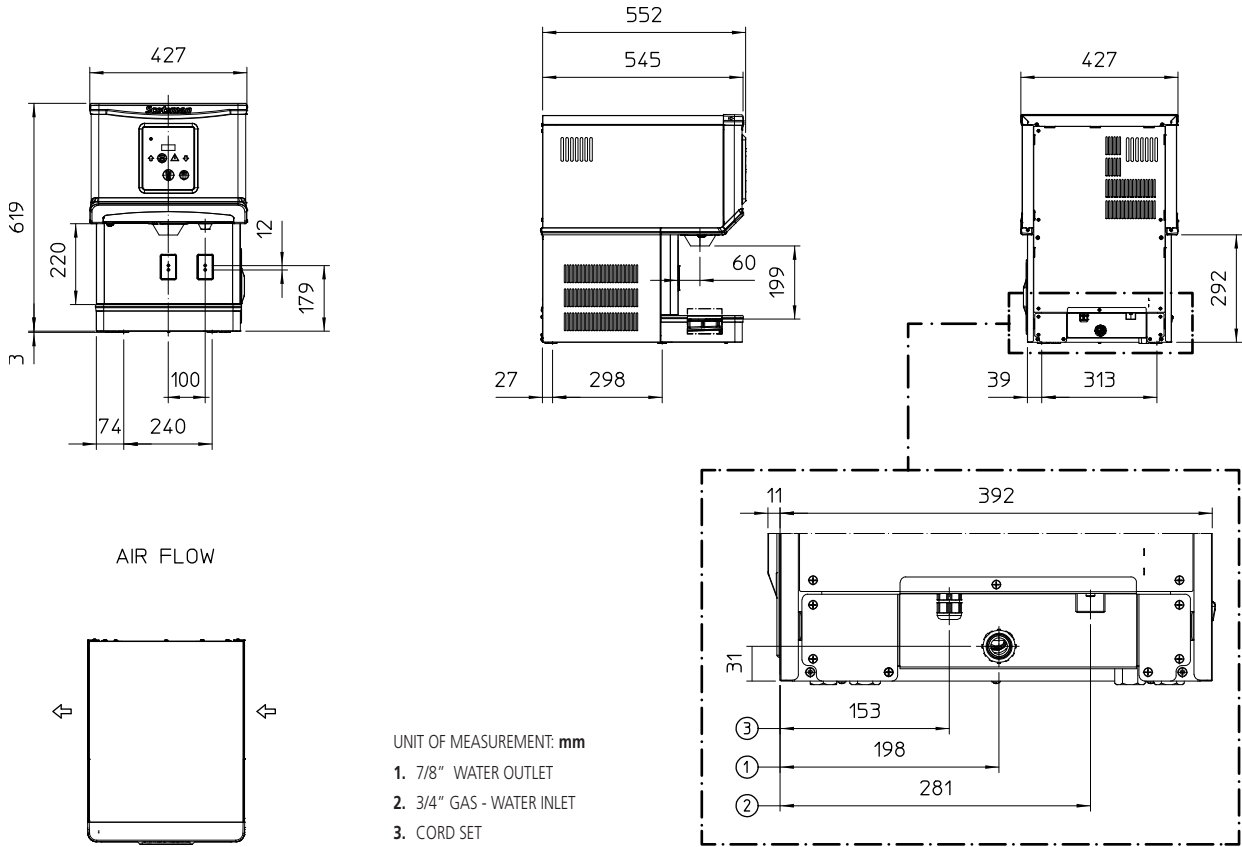

| | | | | | | | | | | | |
|----------------------|--------------|----------|------------------------|-----------|---------------|---------------------|----------------|------------------|---------------|-----|----|
| UNIT DATA | | | Compressor | | Circuit wires | | Max. fuse size | | | | |
| | | | Version | Voltage | Btu/h | W | No. | Ømm ² | A | | |
| Size (W x D x H) | | | 427 x 552 x 622 mm | | DXN 107 AS | | 230/50/1 | | 3 | 1.5 | 10 |
| Net weight | | | 49 kg | | | | | | | | |
| SHIPPING DATA | | | | | | | | | | | |
| Carton (W x D x H) | | | 490 x 610 x 790 mm | | | | | | | | |
| Weight | | | 56 kg | | | | | | | | |
| | | | 24 h ice production kg | | | Energy consumption* | | Water usage* | Instant power | | |
| | | | °C Amb. / °C Water | | | | | | W | | |
| Version | Condensation | Voltage | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/100 kg | kWh/24h | l/h | | | |
| DXN 107 AS | Air | 230/50/1 | 66 | | 48 | 17.0 | 8.1 | 2.0 | 370 | | |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions